


Wrap Belt's

強力型三角皮帶

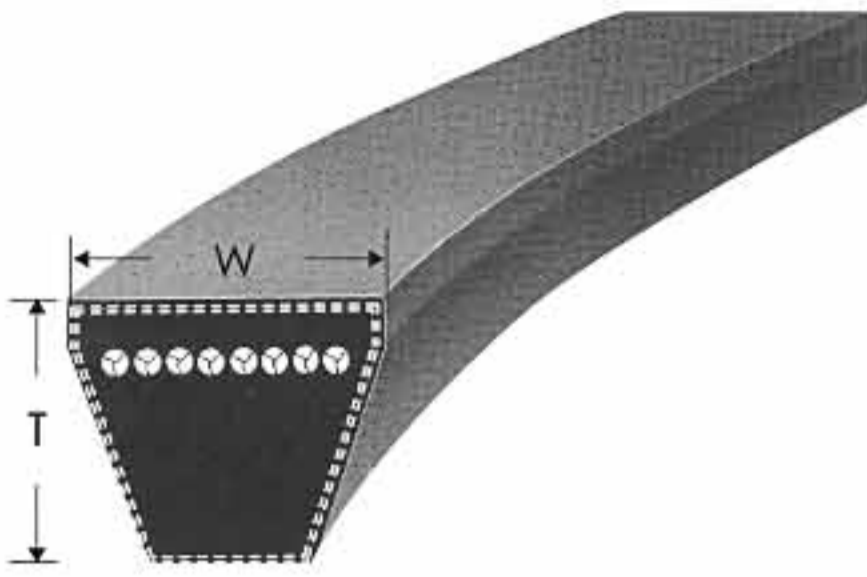


- 所有皮帶均可使用於同一組傳動裝置，符合T/S等長公差認證標準。
- 美國油田協會API認證、耐油、耐熱、耐酸鹼、防靜電、抗火性之安全皮帶。
- 符合ISO4184、BS3790、DIN7753、RMA/MPTA規範。

規格	SPZ	SPA	SPB	SPC	3V	5V	8V
W (mm)	9.7	12.7	16.3	22	9.7	15	25
T (mm)	8	10	13	18	8	13	23

SPZ			SPA			SPB		SPC	3V	5V	8V
Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Outside Length (inches)	Outside Length (inches)	Outside Length (inches)
487	1120	1812	732	1600	2607	1250	3082	2000	250	500	1000
512	1137	1837	757	1632	2632	1320	3150	2120	265	530	1060
562	1150	1850	782	1657	2650	1400	3170	2240	280	560	1120
587	1162	1862	800	1682	2682	1500	3200	2360	300	600	1180
612	1180	1887	857	1700	2720	1600	3250	2500	315	630	1250
630	1202	1900	907	1732	2732	1700	3350	2650	335	670	1320
662	1212	1937	932	1757	2750	1750	3400	2800	355	710	1400
687	1237	1962	950	1782	2782	1800	3425	3000	375	750	1500
710	1250	1987	957	1800	2800	1850	3450	3150	400	800	1600
722	1262	2000	967	1832	2832	1900	3500	3250	425	850	1700
737	1270	2037	982	1857	2847	1950	3550	3350	450	900	1800
750	1287	2050	1000	1882	2882	2000	3650	3450	475	950	1900
762	1312	2087	1007	1900	2900	2020	3675	3550	500	1000	2000
772	1320	2100	1032	1932	2932	2060	3750	3650	530	1060	2120
780	1337	2120	1060	1957	2982	2082	3800	3750	560	1120	2240
787	1347	2137	1082	1982	3000	2120	3825	3850	600	1180	2360
800	1362	2160	1107	2000	3032	2150	3900	3950	630	1250	2500
812	1387	2187	1120	2020	3082	2180	4000	4000	670	1320	2650
825	1400	2240	1132	2032	3150	2240	4060	4250	710	1400	2800
837	1412	2287	1157	2057	3182	2285	4150	4400	750	1500	3000
850	1437	2300	1180	2082	3250	2360	4250	4500	800	1600	3150
862	1462	2332	1207	2120	3282	2410	4310	4750	850	1700	3350
875	1487	2360	1232	2132	3350	2430	4500	4900	900	1800	3550
887	1500	2410	1250	2182	3382	2450	4560	5000	950	1900	3750
900	1512	2432	1272	2207	3450	2482	4750	5300	1000	2000	4000
912	1520	2450	1282	2232	3500	2500	4810	5600	1060	2120	4250
925	1537	2482	1307	2240	3550	2540	5000	6000	1120	2240	4500
950	1562	2500	1320	2282	3650	2580	5070	7100	1180	2360	4750
962	1587	2540	1332	2300	3750	2600	5300	7500	1250	2500	5000
987	1600	2600	1357	2307	3850	2650	5600	8000	1320	2650	
1000	1612	2650	1382	2332	4000	2690	5680	8500	1400	2800	
1012	1637	2690	1400	2360	4250	2730	6000	9000		3000	
1024	1662	2800	1432	2382	4500	2760	6300	9500		3150	
1037	1687	2840	1457	2400		2800	6700	10000		3350	
1047	1700	3000	1482	2432		2840	7100	10600		3550	
1060	1737	3150	1500	2482		2882	7500	11200			
1077	1762	3350	1532	2500		2900	8000	11800			
1087	1787	3550	1557	2532		2950		12500			
1112	1800		1582	2582		3000					

Raw Edge Cogged Belt's 強力齒型三角皮帶

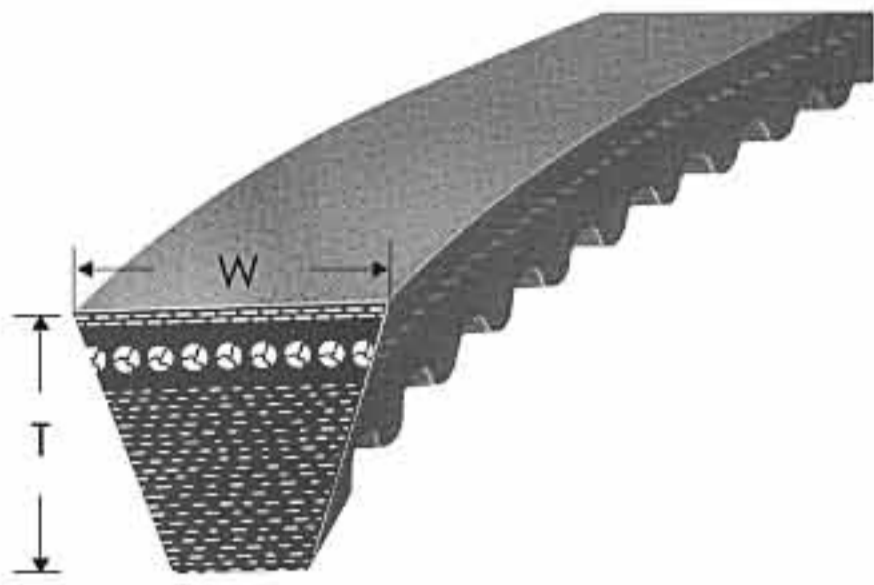

- 所有皮帶均可使用於同一組傳動裝置，符合T/S等長公差認證標準。
- 美國油田協會API認證、耐油、耐熱、耐酸鹼、防靜電、抗火性之安全皮帶。
- 符合ISO4184、BS3790、DIN7753、RMA/MPTA規範。

規格	XPZ	XPA	XPB	XPC	3VX	5VX
W (mm)	9.7	12.7	16.3	22	9.7	15
T (mm)	8	10	13	18	8	13

XPZ			XPA			XPB		XPC	3VX	5VX
Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Pitch Length (mm)	Outside Length (inches)	Outside Length (inches)
587	1137	1950	732	1457	2360	1250	3082	2000	250	500
612	1150	1987	757	1482	2382	1320	3150	2120	265	530
630	1162	2000	782	1500	2400	1400	3170	2240	280	560
637	1180	2037	800	1532	2432	1500	3200	2360	300	600
662	1202	2120	807	1557	2482	1600	3250	2500	315	630
670	1212	2137	832	1582	2500	1700	3350	2650	335	670
687	1237	2160	850	1600	2532	1750	3400	2800	355	710
710	1250	2187	857	1632	2582	1800	3425	3000	375	750
722	1262	2240	882	1657	2607	1850	3450	3150	400	800
737	1270	2287	900	1682	2632	1900	3500	3250	425	850
750	1287	2360	907	1700	2650	1950	3550	3350	450	900
762	1312	2410	932	1707	2682	2000	3650	3450	475	950
780	1320	2500	950	1732	2732	2020	3675	3550	500	1000
787	1337	2540	957	1757	2750	2060	3750	3650	530	1060
800	1362	2650	967	1782	2782	2082	3800	3750	560	1120
812	1387	2800	982	1800	2800	2120	3825	3850	600	1180
825	1400	2840	1000	1832	2832	2150	3900	3950	630	1250
837	1412	2187	1007	1857	2847	2180	4000	4000	670	1320
850	1437	2240	1032	1882	2882	2240	4060	4250	710	1400
862	1450	2287	1060	1900	2900	2285	4150	4400	750	
875	1462	2300	1082	1907	2932	2360	4250	4500	800	
887	1487	2332	1107	1932	2982	2410	4310	4750	850	
900	1500	2360	1120	1957	3000	2430	4500	4900	900	
912	1512	2410	1132	1982	3032	2450	4560	5000	950	
925	1520	2432	1157	2000	3082	2482	4750	5200	1000	
937	1537	2450	1180	2020	3150	2500	4810	5300	1060	
950	1562	2482	1207	2032	3182	2540	5000	5600	1120	
962	1587	2500	1232	2057	3250	2580	5070	6000	1180	
987	1600	2540	1250	2082	3282	2600	5300	7100	1250	
1000	1612	2600	1272	2120	3350	2650	5600	7500	1320	
1012	1637	2650	1282	2132	3382	2690	5680	8000	1400	
1024	1662	2690	1307	2182	3450	2730	6000			
1037	1687	2800	1320	2207	3500	2760	6300			
1047	1700	2840	1332	2232	3550	2800	6700			
1060	1762	3000	1357	2240		2840	7100			
1077	1787	3150	1382	2282		2882	7500			
1087	1800	3350	1400	2300		2900	8000			
1112	1850	3550	1407	2307		2950				
1120	1900		1432	2332		3000				