


紅外線皮帶張力計

GPT-800 Precision instrument for measuring belt tension

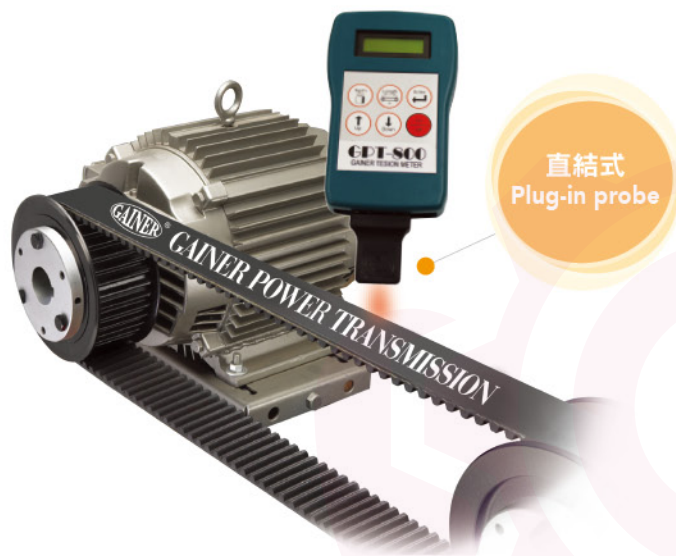

直結式
Plug-in probe

- 最簡易、迅速、準確的脈衝光測量法。
The simplest, swiftest, and most accurate Intense Pulse Light measurement.
- 適用各種廠牌、各種型式的傳動皮帶。
Applicable to all brands and types of conveyor belt.
- 無環境背景噪音的干擾。
No interference of surrounding background noise.
- 可以顯示周波頻率Hz與N/lbf的張力值。
Display tension value of cycle frequency Hz and N/lbf.



延伸型
Measuring
probe with
cable

標準配備 STANDARD EQUIPMENT



規格資料 SPECIFICATION

Item model	GPT-800	Display	2-lind LCD, 16 char./line
Measuring range	10 ~ 800 Hz	Language selection	10 languages
Indication error	± 1Hz	Power supply	9V lithium battery
Digital sampling error	< 1%	Housing	Plastic (ABS)
Free strand length	0~ 9.99 m	Dimensions, unit	80x126x37 mm
Belt mass	0~ 9.999 Kg/m	Dimensions, case	226x178x50 mm
Operating temperature	10~50°C	Gross wight	1kg

- | | | | | | |
|---------------------------------|-----|--|-----|-----------------------------------|-----|
| ▶ 強化塑料攜帶箱
Carrying case | 1pc | ▶ 直結式感應器
Plug-in probe | 1pc | ▶ 9V鋰電池
9V lithium battery | 1pc |
| ▶ 紅外線脈衝光機
Belt Tension Meter | 1pc | ▶ 延伸型感應器
Measuring probe with cable | 1pc | ▶ 操作說明書
Operating Instructions | 1pc |